

Name

Digi Tweed

Designer

Suzanne Tick

Style No.

4058

Use

Upholstery
Wrapped Wall
Panel

Content


55% Recycled
Polyester +
45% Polyester

Abrasion

Wyzenbeek
100,000 double rubs

Environmental

Heavy Metal Free
PFOA/PFOS Free
Stain Repellent
Recycled Content

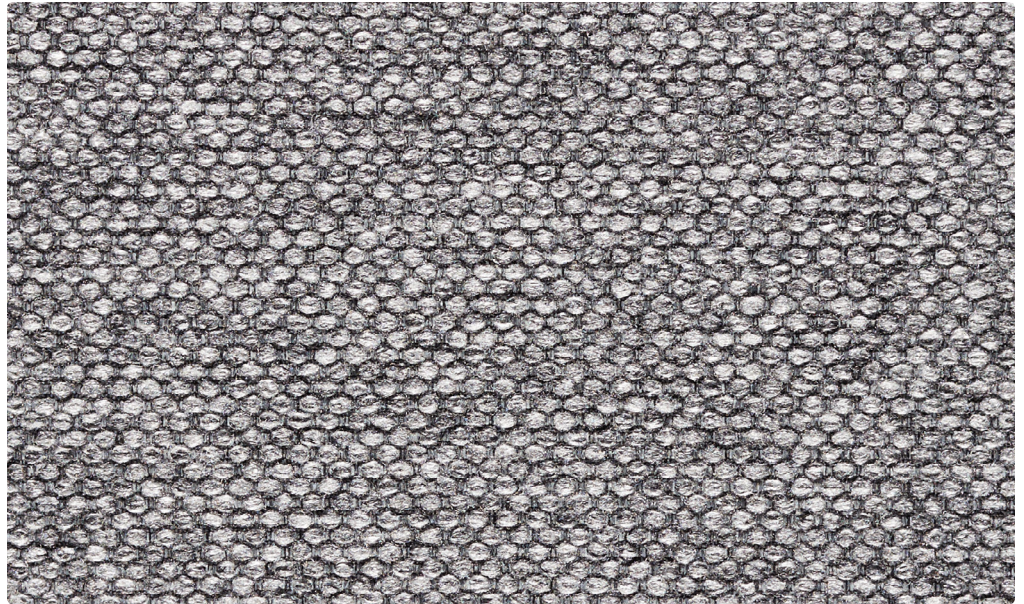

Basalt Tweed 4058-08



Oat Tweed 4058-03



Dust Tweed 4058-01



Topaz Tweed 4058-02



Flax Tweed 4058-04



Loam Tweed 4058-06



Sagebrush Tweed 4058-10




Silt Tweed 4058-05




Crag Tweed 4058-07




Basalt Tweed 4058-08




Sundew Tweed 4058-12



Thistle Tweed 4058-17




Rose Tweed 4058-13



Meadow Tweed 4058-11




Lav Tweed 4058-18



Raspite Tweed 4058-14




Loden Tweed 4058-09



Clear Tweed 4058-19




Madder Tweed 4058-15



Loch Tweed 4058-20



Ocean Tweed 4058-21



Beetroot Tweed 4058-16



Onyx Tweed 4058-23



North Sea Tweed 4058-22



Obsidian Tweed 4058-24



Digi Tweed by Luum

Digi Tweed is a hyper-textural multi-purpose product that is a direct coordinate to Heather Tech. The irregular texture and expansive palette speaks to the need for interior spaces to reflect the natural world. The exaggerated texture and tonal coloration offers designers an opportunity to explore visual dualities through the use of contrasting surfaces. Digi Tweed’s palette draws inspiration from honest and natural materials.

Name	Digi Tweed
Style No.	4058
Designer	Suzanne Tick
Specification	Use: Upholstery/Wrapped Wall/Panel Content: 55% Recycled Polyester (Postconsumer) + 45% Polyester Weight: 19.6 oz per linear yard Width: 54" Pattern Repeat: None Directional: Yes
Finish	Stain Repellent
Performance	Abrasion: ASTM D4157 Wyzenbeek 100,000 double rubs Breaking Strength: ASTM D5034 Warp 331 lbf, Fill 368 lbf Seam Slippage: ASTM D4034 Warp 158 lbf, Fill 242 lbf Colorfastness to Light: AATCC 16, Grade 4 at 40 Hours Colorfastness to Crocking: AATCC 8, Wet Class 4, Dry Class 4 Pilling: ASTM D3511 (Brush Pill), Class 4.5
Acoustical Rating	ISO 10534-2 Noise Reduction Coefficient (NRC) 70
Flame Retardancy	Cal TB 117-2013 ASTM E84 Unadhered Class A or 1
Maintenance	WS, Clean with either a water-based or solvent-based cleaning agent.
Environmental	Heavy Metal Free PFOA/PFOS Free Stain Repellent Recycled Content
Origin	USA Dye lots may vary slightly from samples shown. Samples shown off the bolt.
A 🔥 🌿 ☀️ ⭐ *	

Canada 877.705.LUUM luumtextiles.ca	USA 877.705.LUUM luumtextiles.com	International 919.464.2922 luumtextiles.com
---	---	---