

Name

Heather Tech

Designer

Suzanne Tick

Style No.

4059

Use

Upholstery
Wrapped Wall
Panel

Content


67% Recycled
Polyester +
33% Polyester

Abrasion

Wyzenbeek
100,000 double rubs

Environmental


Heavy Metal Free
PFOA / PFOS Free
Stain Repellent
Recycled Content

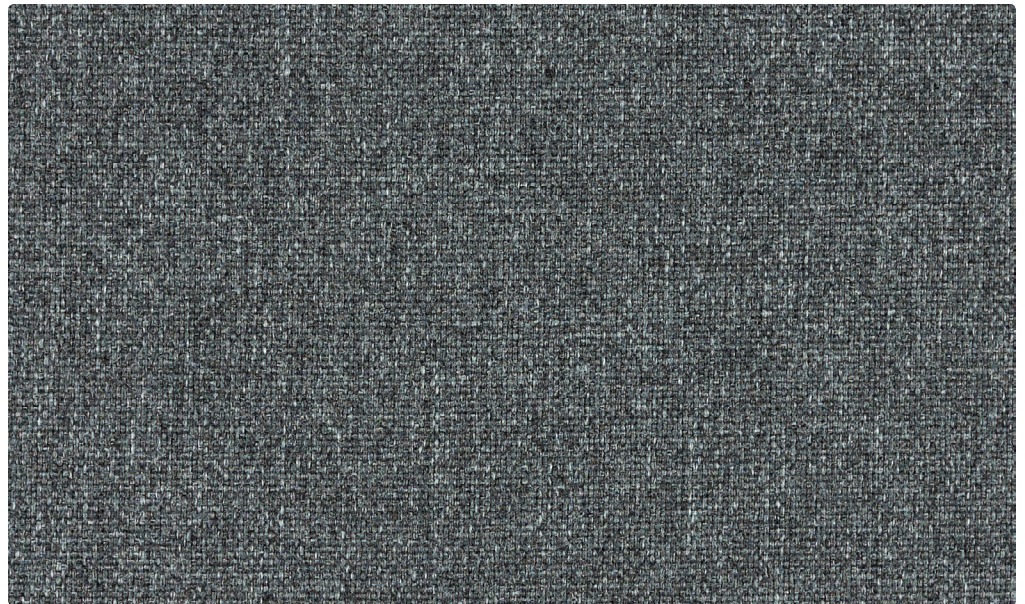

Basalt Tech 4059-08




Oat Tech 4059-03



Dust Tech 4059-01



Topaz Tech 4059-02



Flax Tech 4059-04



Loam Tech 4059-06




Sagebrush Tech 4059-10




Silt Tech 4059-05




Crag Tech 4059-07




Basalt Tech 4059-08



Sundew Tech 4059-12




Thistle Tech 4059-17




Rose Tech 4059-13




Meadow Tech 4059-11




Lav Tech 4059-18




Raspite Tech 4059-14




Loden Tech 4059-09




Clear Tech 4059-19



Madder Tech 4059-15




Loch Tech 4059-20




Ocean Tech 4059-21



Beetroot Tech 4059-16



Onyx Tech 4059-23



North Sea Tech 4059-22



Obsidian Tech 4059-24



Heather Tech by Luum

Heather Tech speaks to the scientific yet experimental process of fiber blending. A color can be transformed depending on the material, process and conditions under which it is viewed. Nuanced color is created by balancing precise dye formulations adjusted to maintain the subtle, matte texture. Muted and soft, rich and saturated, the multi-purpose palette is a direct and complementary coordinate to Digi Tweed.

Name

Heather Tech

Style No.

4059

Designer

Suzanne Tick

Specification

Use: Upholstery/Wrapped Wall/Panel
Content: 67% Recycled Polyester (Postconsumer) + 33% Polyester
Weight: 13.8 oz per linear yard
Width: 54"
Pattern Repeat: None
Directional: No

Finish

Stain Repellent

Performance

Abrasion: ASTM D4157 Wyzenbeek 100,000 double rubs
Breaking Strength: ASTM D5034 Warp 294 lbf, Fill 219 lbf
Seam Slippage: ASTM D4034 Warp 182 lbf, Fill 154 lbf
Colorfastness to Light: AATCC 16, Grade 4 at 40 Hours
Colorfastness to Crocking: AATCC 8, Wet Class 4, Dry Class 4
Pilling: ASTM D3511 (Brush Pill), Class 4.5

Acoustical Rating

ISO 10534-2 Noise Coefficient (NRC) 70

Flame Retardancy

Cal TB 117-2013
ASTM E84 Unadhered Class A or 1

Maintenance

WS, Clean with either a water-based or solvent-based cleaning agent.

Environmental

Heavy Metal Free
PFOA / PFOS Free Stain Repellent
Recycled Content

Origin

USA

Dye lots may vary slightly from samples shown. Samples shown off the bolt.



Canada
877.705.LUUM
luumtextiles.ca

USA
877.705.LUUM
luumtextiles.com

International
919.464.2922
luumtextiles.com

cdn/us/int/01-18

© Luum™ 2017, all rights reserved.
*,™ Trademarks used under license by Luum™, Heather Tech™
*Certification Marks owned by the Association for Contract Textiles, Inc.

U1-A2-P1 — SC-305-4059